



**trafimet**  
**distribution**

YOUR WELDING PARTNER

**ADAPTIVE POWER**

**ERGOCUT**

**S 65**


## THE NEW PLASMA CUTTING TORCH ERGOCUT S 65

**ERGOCUT S 65** is the new Trafimet torch for Plasma cutting without high frequency, thanks to the innovative project becomes the standard reference for 60 A torches.

Rapid process cycling and quick cutting speed with a overall high quality of cut, are some of the important characteristics of this torch.

**ERGOCUT S 65** is particularly suitable for the customers who demand the highest cut quality, unmatched reliability and ease of use.

### LONGER CONSUMABLE LIFE

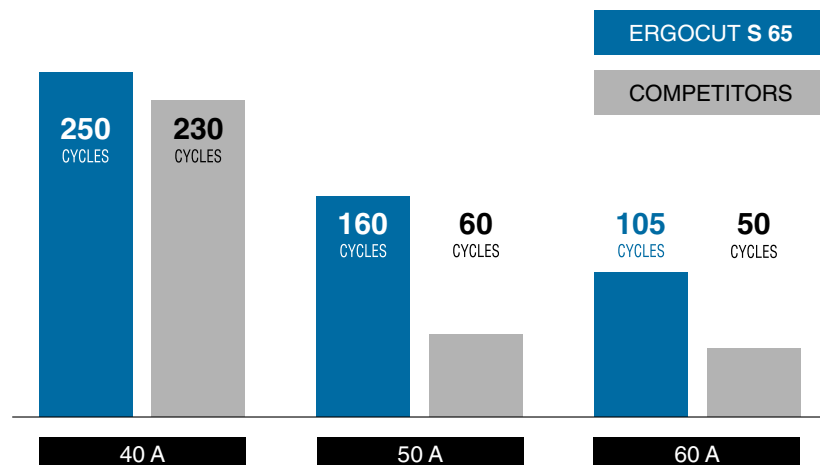

### STANDARD CONFIGURATION PERFORMANCES

- Mild steel
- Thickness 10 mm
- Current 60 A
- Cutting speed 1 meter per minute

### SAFETY

**ERGOCUT S 65** handle protect the user thanks to the increase distance between the contact tip and the hand.

### HI-PERFORMANCE

The **ERGOCUT S 65** guarantees optimized cutting performance and long lasting spare parts.

### EFFICENCY

New design spare parts, the **ERGOCUT S 65** support high cutting speed reducing the time and cost of your manufacturing process.

# ERGOCUT S 65



NO HF


6 m

0.4 Kg

1 m

V peak	500	4 bar	100 l/min
X 60%	60 A	8÷20 mm	

CODE	↔	
PA2200	6 m	Central Adaptor
PA2201	6 m	1/4 G
PA2202	6 m	Central Adaptor
PA2203	6 m	1/4 G

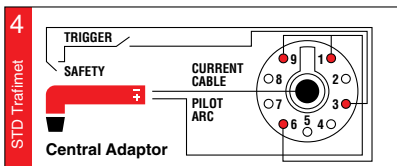


## Circle Cutting Attachment

CV0025



## FLOW METER

Included in the box



test the airflow of your torch before use



EN 60974-7



PR0098



PR0106



PR0098



PE0106



PE0106



PE0106



Ø	Cu	
0,8	PD0098-08	40 A
1,0	PD0098-10	60 A



Ø	Cu	
0,8	PD0198-08	40 A
1,0	PD0198-10	60 A



Ø	Cu	
1,6	PD0199-16 gouging	

PC0098



PC0198  
Long Life




PC0198  
Long Life



CV1118



CV0298




CV0299



DRAG

GOUGING

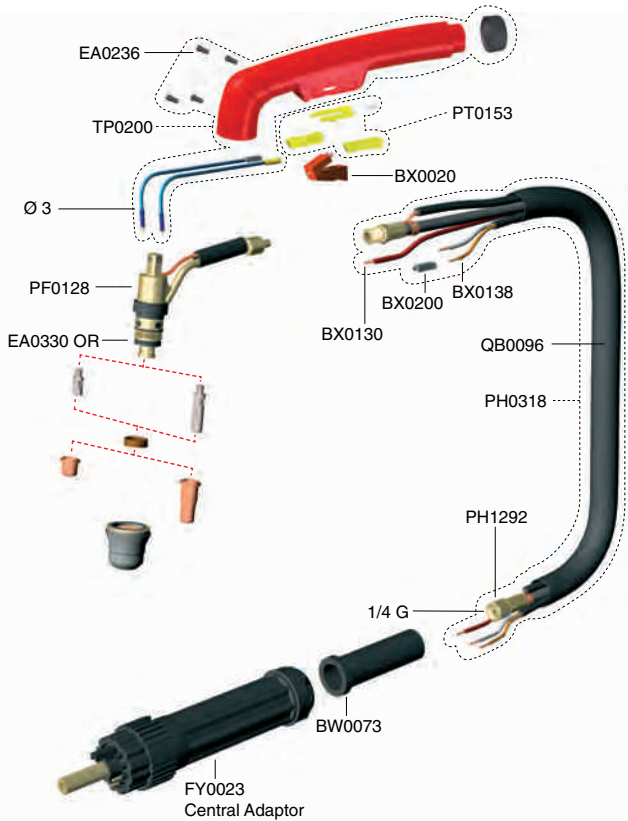

DRAG

STANDARD